

IC SERIES LED FOUNTAIN LIGHT





DESIGN / SPECIFICATION DATA:



Aquascape IC series LED Fountain lights are designed for a great illumination requirement for Underwater Lighting, Water feature, ponds and fountains large scale commercial underwater applications.

Lights incorporates High-power LEDs made by Cree and it is offering IP68 protection. Light Housing is made of Superior quality, highly durable & corrosion resistant Stainless steel 316 investment casting with stylish finishing. Lights are available in RGB, RGBW DMX & Warm White.

MODEL: IC009 12V X 9W




MODEL: IC012 12V X 12W




SPECIFICATION

Model	IC009	IC012
Voltage	12V DC	12V DC
Wattage	9W	12W
Light Colour	RGB, WARM WHITE	RGB, WARM WHITE, RGBW DMX
Bulb Type	LED	LED
Beam Angle	10° /15°	10° /15°
Dominant Wavelength (RGB)(nm/K)	R: 620-630 G: 520-535 B: 465-485	R: 620-630 G: 520-535 B: 465-485
Dominant Wavelength (nm/K)	W/W: 2800-3200K	W/W: 2800-3200K
Luminous Flux	120 LM/W	120 LM/W
Operating Temp	-20 - +50°C	-20 - +50°C
Storage Condition	-40 - +80°C, 10-95% RH	-40 - +80°C, 10-95% RH
Cable	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH
Protection Class	IP68	IP68
Casting	STAINLESS STEEL 316	STAINLESS STEEL 316


MODEL: IC018 12V X 18W

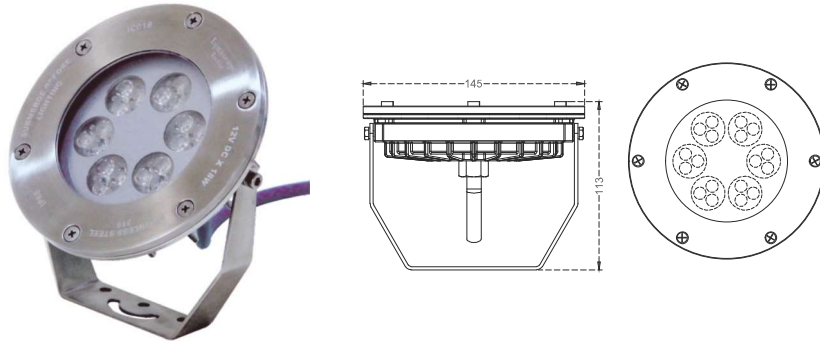

MODEL: IC036 12V X 36W

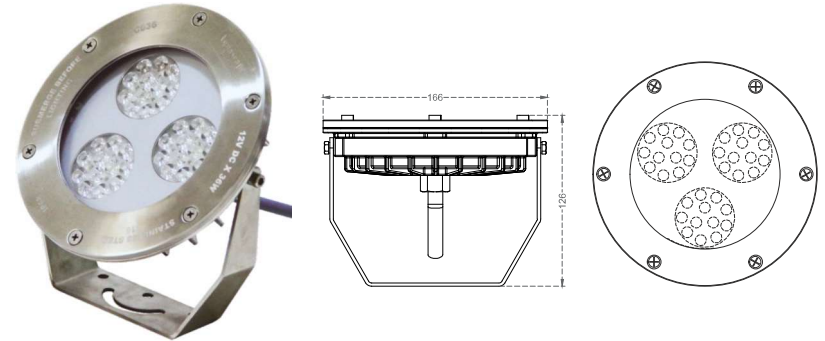

MODEL: IC024 12V X 24W

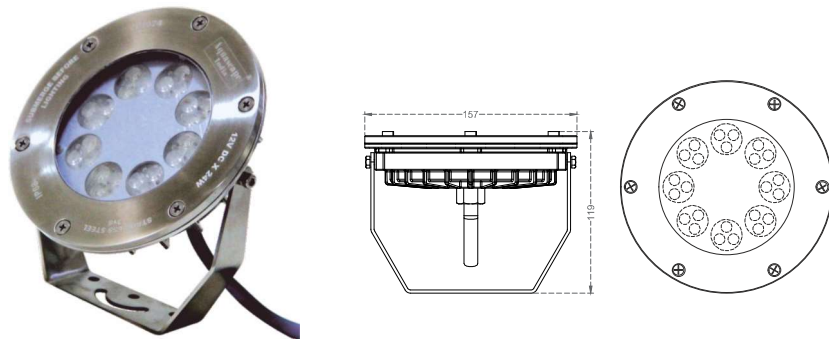

SPECIFICATION

Model	IC018	IC024	IC036
Voltage	12V DC	12V DC	12V DC
Wattage	18W	24W	36W
Light Colour	RGB, WARM WHITE	RGB, WARM WHITE, RGBW DMX	RGB, WARM WHITE, RGBW DMX
Bulb Type	LED	LED	LED
Beam Angle	15° / 25°	15° / 25°	15° / 25°
Dominant Wavelength (RGB)(nm/K)	R: 620-630 G: 520-535 B: 465-485	R: 620-630 G: 520-535 B: 465-485	R: 620-630 G: 520-535 B: 465-485
Dominant Wavelength (nm/K)	W/W : 2800-3200K	W/W : 2800-3200K	W/W : 2800-3200K
Luminous Flux	120 LM/W	120 LM/W	100 LM/W
Operating Temp	-20 - +50°C	-20 - +50°C	-20 - +50°C
Storage Condition	-40 - +80°C, 10-95% RH	-40 - +80°C, 10-95% RH	-40 - +80°C, 10-95% RH
Cable	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH
Protection Class	IP68	IP68	IP68
Casting	STAINLESS STEEL 316	STAINLESS STEEL 316	STAINLESS STEEL 316