


WMT SERIES WALL MOUNTED LED LIGHT



DESIGN / APPLICATION DATA:

WMT Series Wall mounted LED light is suitable as spot light for fountains, pools, ponds, water gardens etc. Also this light designed for step and brick light. It can be used in masonry and wood constructions. These fixtures are designed to safety illuminate stairways and walkways. For the effect shown below, the steps are gently illuminated leading up to the doorway to ensure safety.

Light fixture completely realized in stainless steel with ABS plastic niche .

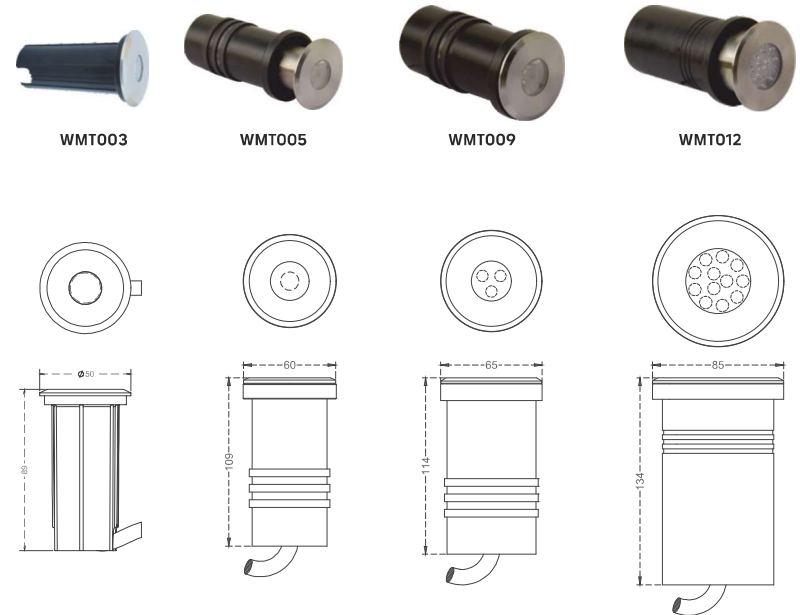

SPECIFICATION

Model	WMT003	WMT005	WMT009	WMT012
Voltage	12V DC	12V DC	12V DC	12V DC
Wattage	3W	5W	9W	12W
Light Colour	WARM WHITE, WHITE, BLUE	RGB, WARM WHITE	RGB, WARM WHITE, WHITE, BLUE	RGB, WARM WHITE, BLUE
Bulb Type	LED	LED	LED	LED
Beam Angle	10° / 15°	15°	10° / 15°	10° / 15°
Operating Temperature	-20 ~ +50°C	-20 ~ +50°C	-20 ~ +50°C	-20 ~ +50°C
Storage Condition	-40 ~ -80°C, 10-95% RH	-40 ~ -80°C, 10-95% RH	-40 ~ -80°C, 10-95% RH	-40 ~ -80°C, 10-95% RH
Cable	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH
Protection Class	IP68	IP68	IP68	IP68
Casting	STAINLESS STEEL 316	STAINLESS STEEL 316	STAINLESS STEEL 316	STAINLESS STEEL 316

APPLICATION DATA:

WMT009 and WMT012 have an optional stand feature available. Both these models offer useful options in Wall Mounted as well as Stand Mounted fittings. The fittings come with an adjustable Stand which makes for easy positioning for the best effect. Stand is made up from SS316 Material.

Optional : With Stand
Available in only WMT009 & WMT012



WMT SERIES WALL MOUNTED LED LIGHT



DESIGN / APPLICATION DATA:

WMT Series Wall mounted LED light is suitable as spot light for fountains, pools, ponds, water gardens etc. Also this light designed for step and brick light. It can be used in masonry and wood constructions. These fixtures are designed to safety illuminate stairways and walkways. For the effect shown below, the steps are gently illuminated leading up to the doorway to ensure safety.

Light fixture completely realized in stainless steel with ABS plastic niche .








WMT018



WMT024



WMT036



SPECIFICATION

Model	WMT018	WMT024	WMT036
Voltage	12V DC	12V DC	12V DC
Wattage	18W	24W	36W
Light Colour	RGB, WARM WHITE	RGB, WARM WHITE	RGB, WARM WHITE
Bulb Type	LED	LED	LED
Beam Angle	15°/25°	15°/25°	15°/25°
Operating Temperature	-20 ~ +50°C	-20 ~ +50°C	-20 ~ +50°C
Storage Condition	-40 ~ +80°C, 10-95% RH	-40 ~ +80°C, 10-95% RH	-40 ~ +80°C, 10-95% RH
Cable	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH	H07RN-F CABLE 2.5 MTR LENGTH
Protection Class	IP68	IP68	IP68
Casting	STAINLESS STEEL 316	STAINLESS STEEL 316	STAINLESS STEEL 316