

ROTATING JET PF 1200 SERIES ROTATING NOZZLES



DESIGN / APPLICATION DATA:

The Parrot / Peacock tail Nozzles rotating multi stream clear jet in animated swirling, spinning effect. Rotation is done without mechanical devices via water output from six-angled nozzle that turn with the vertical seventh center nozzle. Rotation, Speed and display size are adjustable with the water control valve. The Parrot / Peacock tail offers an impressive dancing display with minimal water requirement.

SPECIFICATION DATA:

Material of construction is brass and bronze.

The Parrot / Peacock tail Nozzles are BSP (M) threads.

The Parrot / Peacock tail Nozzles may cause injury due to their configuration do they should not be mounted in swimming pools.



The Parrot / Peacock tail Nozzles are water level independent and can be located in dry areas.

OPERATING DATA:

Noise : Low
 Visibility : Poor
 Splash/Mist : Low to moderate
 Wind Stability : Poor
 Aeration Quality : Poor



PF 1201 (Parrot)





1" BSP/NPT (M)

PF 1201 (Parrot)



PF 1205 (Parrot)



1" BSP/NPT (M)

PF 1205 (Parrot)

HYDRAULIC DATA




Model No.	BSP/ NPT	Dimension A (mm)	Dimension B (mm)	Orifice in mm	Display Height in Mtr	Spread Dia in Mtr	LPM	Head in Mtr
PF 1201	1"	195	223	6@4.7mm 1@2.5mm	1.00	1.50	22	1
					1.25	2.00	26	2
					1.50	2.25	30	3
					1.75	2.50	34	4
					2.00	3.00	38	5
					2.50	3.50	42	6
PF 1205	1"	248	351	7@6mm	1.00	1.50	50	1.90
					1.25	2.00	56	2.10
					1.50	2.25	62	2.50
					1.75	2.50	68	2.75
					2.00	3.00	72	3.25
					2.50	3.50	80	4.00
					3.00	4.00	86	5.00
					3.50	4.50	95	6.00
					4.00	5.00	100	6.50




PF 1202 (Peacock Tail)



PF 1206




PF 1202 (Peacock Tail)




PF 1206

HYDRAULIC DATA

Model No.	BSP/ NPT	Dimension A (mm)	Dimension B (mm)	Orifice in mm	Display Height in Mtr	Spread Dia in Mtr	LPM	Head in Mtr
PF 1202	1 1/4"	300	435	17@4.9mm	2.50	3.50	120	3
					3.00	4.00	132	4
					3.50	4.50	150	5
					4.00	5.00	165	6
PF 1206	1 1/4"	165	350	17@4mm	1.00	1.50	95	1.25
					1.50	2.00	110	1.85
					2.00	2.50	125	2.45
					2.50	3.00	140	3.10
					3.00	3.50	155	3.70

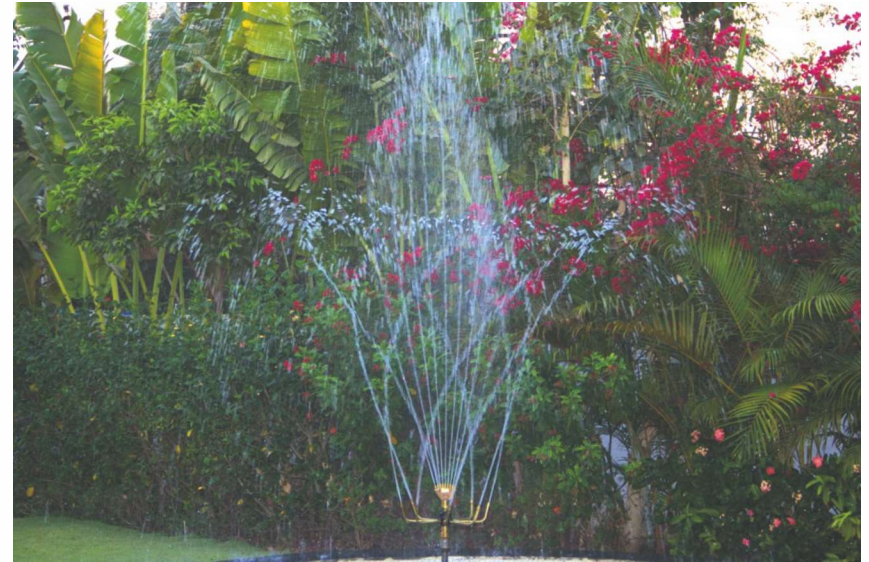

PF 1202

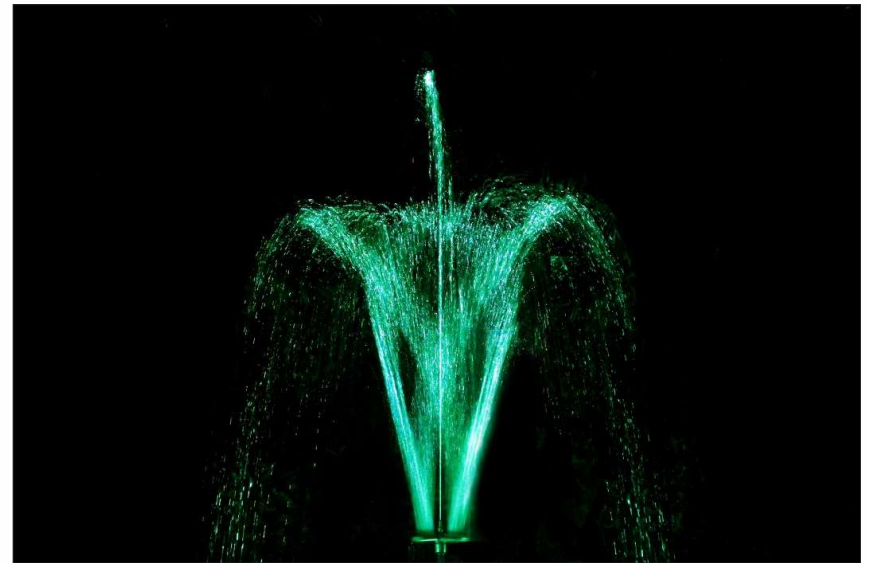

PF 1206